

## SNR 15



The PRO15 custom hearing protector is an ideal choice to wear in less intense noisy environments or for those that are only subjected to the environment for shorter periods of time.


The PRO15 gives a fairly flat and even attenuation across the frequency range with a small increase in the more harmful high frequencies.

PRO-15 provides protection in sound levels of up to 100dB

PRO15 has been tested and certified to meet the European standard for hearing protectors, EN352-2. Full attenuation data and specification table is available below.

### Acoustic Specification

Minimum guaranteed damping level (dB)	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	H	M	L	SNR
PRO 15	11	11.5	12	12	12.5	15.3	17.2	14	13	12	15

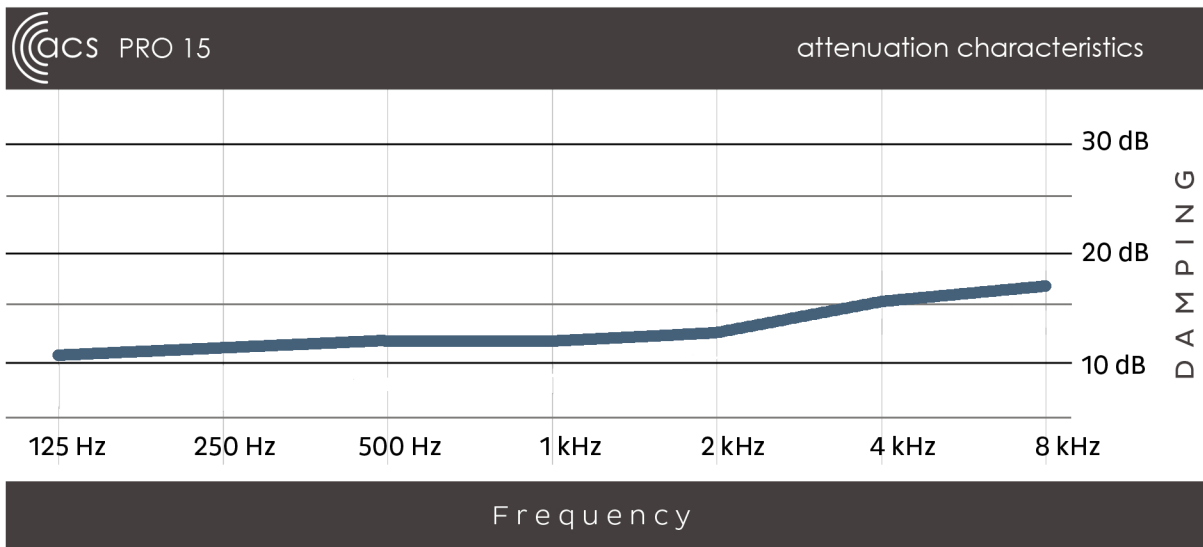

Weight	3g Net   83g Gross   Average weight will vary according to ear size	
Build Material	40 Shore Medical Grade Silicone	
Mould Type	Canal Mould	
Standard Colour	Clear	
Included Accessories	Instruction Leaflet, Wax Pick, Comfort Cream, Carry case	
Optional Accessories	Neck cord, Grips	
Package Dimensions	100mm x 55mm x 38mm	
Warranty Period	1 Year against manufacturing and component failure	
Tested to conform to EU Noise at Work Standard EN352-2		
Attenuation Determined by BSI Product Services (0086), Maylands Avenue		
Hemel Hempstead, Herts, HP2 4SQ		

